
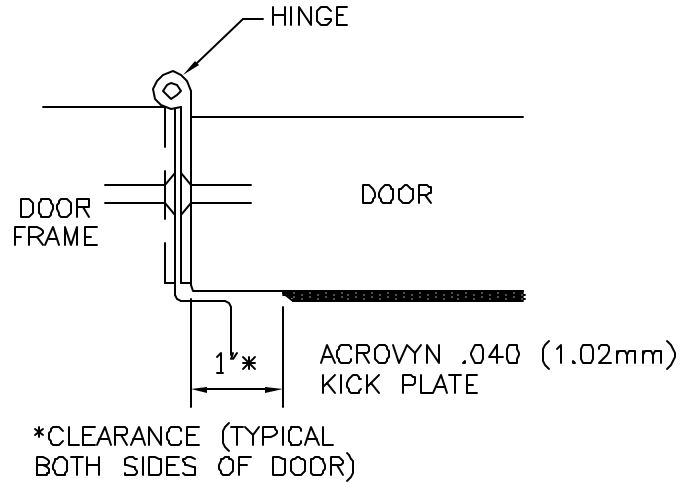


COLOR:
 COLOR TO BE SELECTED FROM ONE OF C/S
 60 STANDARD COLORS

UNITS REQ'D	DIM. A	DIM. B	DIM. C	DIM. D

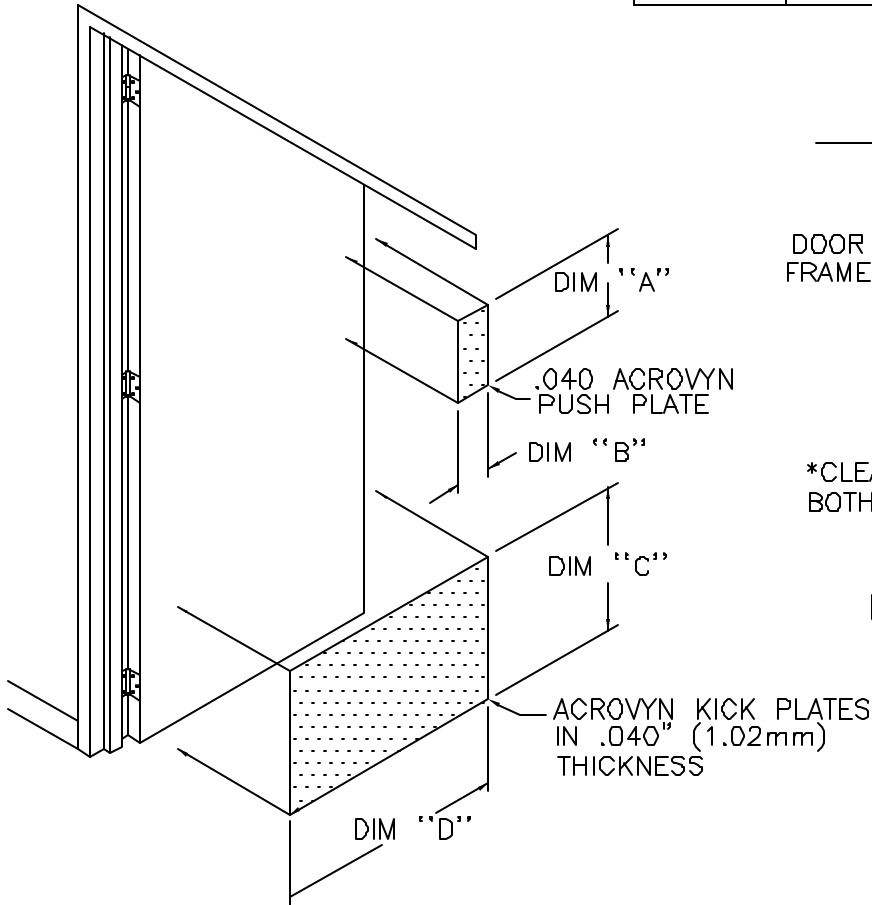

DETAIL AT HINGE
 DOOR IN CLOSED POSITION

PUSHPLATES AND KICKPLATES TO BE
 INSTALLED USING FIELD APPLIED CONTACT
 ADHESIVE SUPPLIED BY C/S.
 UNLESS OTHERWISE NOTED

- CONTRACTOR NOTE:
- 1) ALL DIMENSIONS SHOWN ARE ACTUAL PUSH-PLATE, KICKPLATE DIMENSIONS.
 - 2) ACROVYN PUSHPLATES, AND KICKPLATES ARE SUPPLIED IN .040 THICKNESS, COMPLETE WITH BEVELED EDGES.
 - 3) PUSHPLATES AND KICKPLATES TO BE INSTALLED USING FIELD APPLIED CONTACT ADHESIVE SUPPLIED BY C/S. UNLESS OTHERWISE NOTED

DOOR PROTECTION MODEL 1-DP .040

C/S GROUP

MUNCY, PA 17756
 VISTA, CA 92083
 MISSISSAUGA, ONTARIO, CANADA

PROJECT:		REV. :
LOCATION:		F&F:
CUSTOMER:		SHEET OF
AGENT:		JOB NO.
DWG. BY:	DATE:	