


COLOR: _____
 COLOR TO BE SELECTED FROM ONE OF C/S
 STANDARD COLORS

UNITS REQ'D	HEIGHT	WIDTH

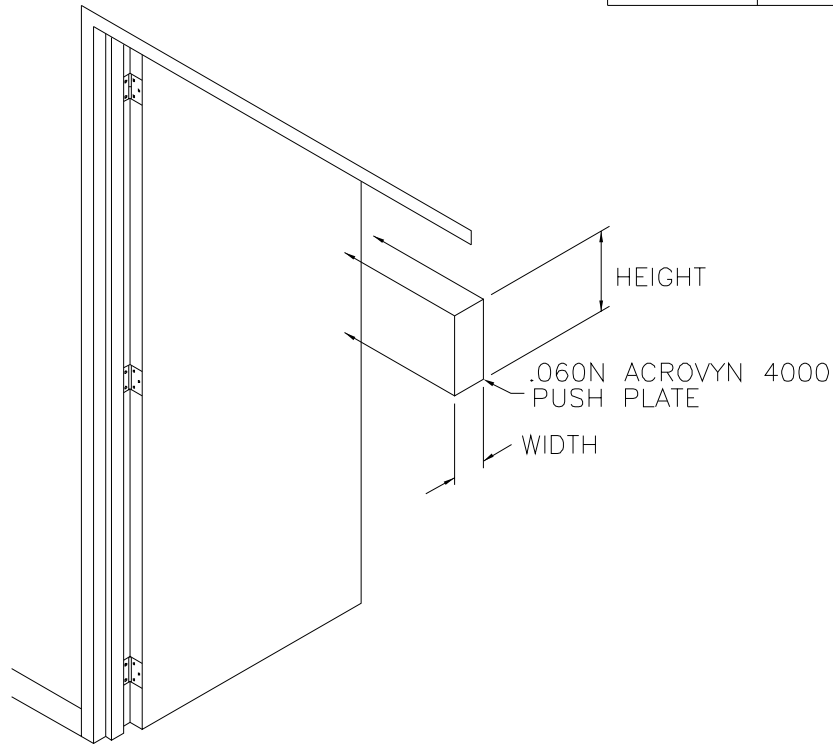


PUSHPLATES TO BE INSTALLED USING
 FIELD APPLIED CONTACT ADHESIVE
 SUPPLIED BY C/S UNLESS
 OTHERWISE NOTED. IF PUSHPLATES
 ARE TO BE MECHANICALLY FASTENED,
 DRILLING IS TO BE DONE IN FIELD.

CONTRACTOR NOTE:

- 1) ALL DIMENSIONS SHOWN ARE ACTUAL PUSH-
 PLATE DIMENSIONS.
- 2) ACROVYN 4000 PUSHPLATES ARE SUPPLIED IN
 .060" THICKNESS, COMPLETE WITH BEVELED
 EDGES.
- 3) PUSHPLATES TO BE INSTALLED USING FIELD
 APPLIED CONTACT ADHESIVE SUPPLIED BY
 C/S UNLESS OTHERWISE NOTED. IF
 PUSHPLATES ARE TO BE MECHANICALLY
 FASTENED, DRILLING IS TO BE DONE IN FIELD.

.060N PUSHPLATES

 <p>Construction Specialties™ 6696 Route 405 Highway, Muncy PA 17756 (800) 233-8493 • Fax (570) 546-4692 • www.c-sgroup.com</p>	PROJECT:		REV. :
	LOCATION:		F&F:
	CUSTOMER:		SHEET OF
	AGENT:		JOB NO.
	DWG. BY:	DATE:	