


COLOR: _____


TEXTURE: _____

COLOR TO BE SELECTED FROM ONE OF C/S 60 STANDARD COLORS.

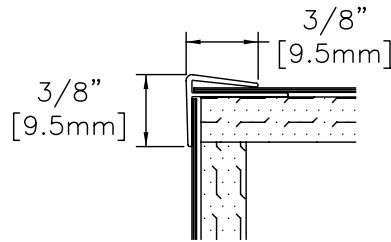


OUTSIDE CORNER
(25N032XXX)

NO. REQ'D: _____




INSIDE CORNER
(25N035XXX)

NO. REQ'D: _____



WAINSCOT TRIM
(25N036XXX)

NO. REQ'D: _____

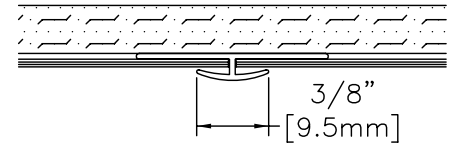

"H" JOINT MOLDING
(25N033XXX)

NO. REQ'D: _____


GENERAL NOTES:

- 1) STANDARD SHEET SIZES: 4'x8' OR 4'x10' WITH THE EXCEPTION OF TEXTURED SHEET TEXTURED SHEET IS ONLY AVAILABLE IN 43"x90" OR 43"x114" SHEETS. WITH MINIMUM .040 THICKNESS.
- 2) .040 ACROVYN WALL COVER IS SUPPLIED WITH A STANDARD PEBBLETTE TEXTURE. OPTIONAL TEXTURES AVAILABLE UPON REQUEST. AT AN ADDITIONAL COST. OPTIONAL TEXTURE SIZES ARE SUPPLIED IN 43" X 90" OR 43" X 114".
- 3) ALL TRIM MEMBERS SHALL BE SUPPLIED IN HIGH IMPACT VINYL/ACRYLIC ALLOY IN 10' LENGTHS.
- 4) TO INSURE PROPER INSTALLATION OF .040 ACROVYN COVERING, USE INSTALLATION SHEETS INCLUDED WITH EACH HARDWARE SHIPMENT.
- 5) COLOR SELECTION MUST BE INCLUDED WITH THE APPROVED DRAWINGS TO PREVENT ANY DELAYS IN THE SHIPMENT OF MATERIALS.
- 6) .040 ACROVYN WALL COVER IS AVAILABLE IN ANY OF C/S 60 STANDARD COLORS. CHAMELEON PATTERNS ARE AVAILABLE UPON REQUEST AT AN ADDITIONAL COST.

INSTALLATION NOTES:

- 1) WAINSCOT TRIM QUANTITY IS CALCULATED FOR WAINSCOT USE ONLY. NOT FOR EDGE TRIM.
- 2) INSIDE CORNER TRIM QUANTITY IS BASE ON WHERE SHEET IS ON ADJOINING WALLS
- 3) OUTSIDE CORNER TRIM QUANTITY IS BASED ON SHEET ON BOTH WALLS AT CORNER.

CEILING HEIGHT

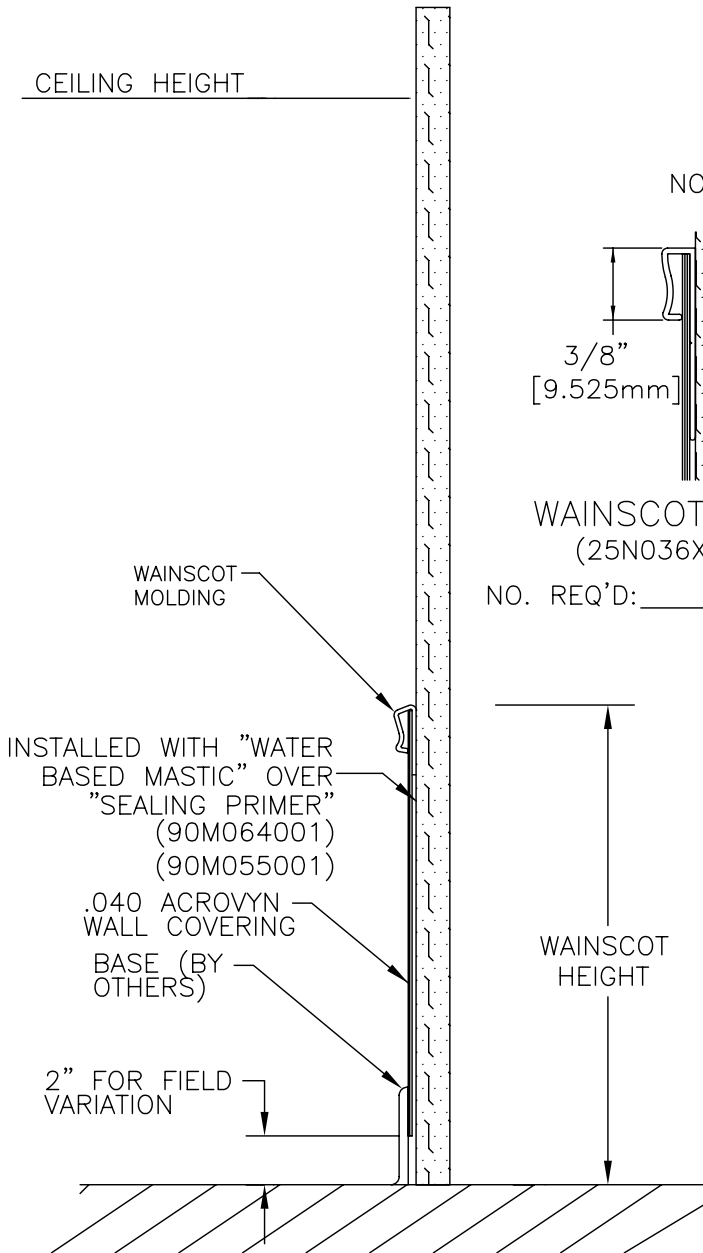

INSTALLED WITH "WATER BASED MASTIC" OVER "SEALING PRIMER" (90M064001) (90M055001)

.040 ACROVYN WALL COVERING

BASE (BY OTHERS)

2" FOR FIELD VARIATION

WAINSCOT HEIGHT

MATERIAL TO BE SUPPLIED IN 4'x8' OR 4'x10' SHEETS
NO. 4'x 8' SHEETS REQ'D. (25S001XXX): _____

NO. 4'x 10' SHEETS REQ'D. (25S018XXX): _____

.040 ACROVYN AT PARTIAL HEIGHT

C/S GROUP

MUNCY, PA 17756
MISSISSAUGA, ONTARIO, CANADA

PROJECT:

REV.

LOCATION:

F&F

CUSTOMER:

SHEET OF

AGENT:

JOB NO.

DWG. BY:

DATE: