



COLOR: \_\_\_\_\_

COLOR TO BE SELECTED FROM ONE OF C/S 60 STANDARD COLORS.

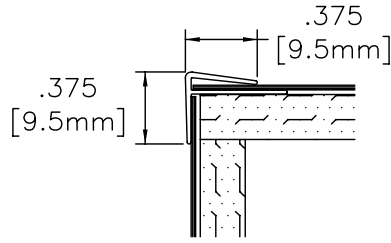


OUTSIDE CORNER  
(25N032XXX)

NO. REQ'D: \_\_\_\_\_




INSIDE CORNER  
(25N035XXX)

NO. REQ'D: \_\_\_\_\_

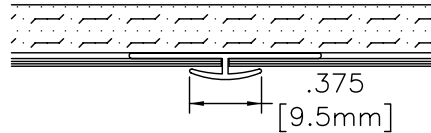


"H" JOINT MOLDING  
(25N033XXX)

NO. REQ'D: \_\_\_\_\_



WAINSCOT TRIM  
(25N036XXX)

NO. REQ'D: \_\_\_\_\_

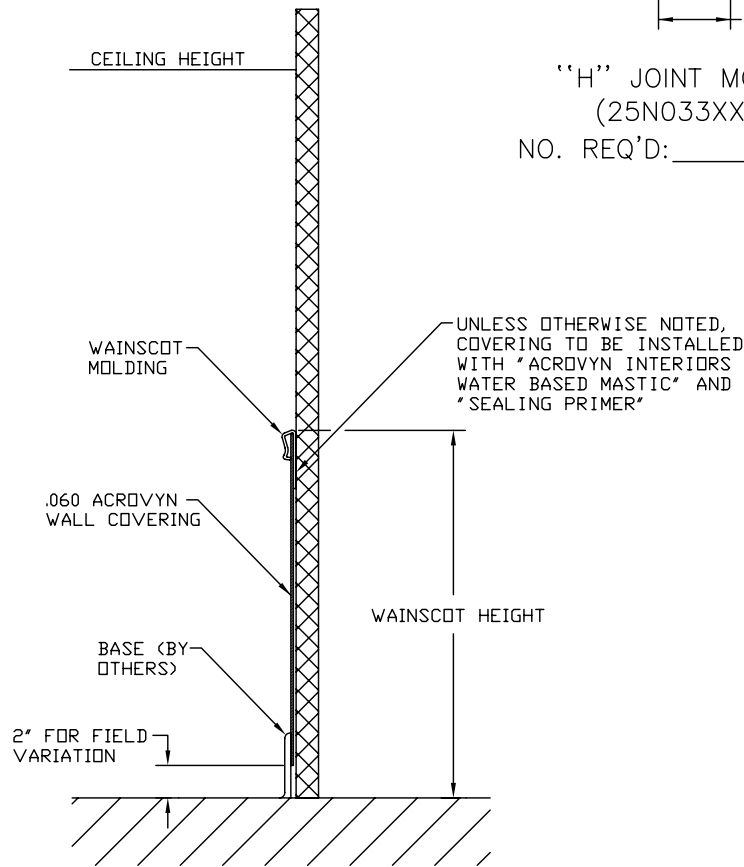

UNLESS OTHERWISE NOTED,  
COVERING TO BE INSTALLED  
WITH "ACROVYN INTERIORS  
WATER BASED MASTIC" AND  
"SEALING PRIMER"

GENERAL NOTES:

- 1) STANDARD SHEET SIZES: 4'x8' OR 4'x10' WITH MINIMUM .060 THICKNESS.
- 2) .060 ACROVYN WALL COVER IS SUPPLIED WITH A STANDARD PEBBLETTE TEXTURE.
- 3) ALL TRIM MEMBERS SHALL BE SUPPLIED IN HIGH IMPACT VINYL/ACRYLIC ALLOY IN 10' LENGTHS.
- 4) TO INSURE PROPER INSTALLATION OF .060 ACROVYN COVERING, USE INSTALLATION SHEETS INCLUDED WITH EACH HARDWARE SHIPMENT.
- 5) COLOR SELECTION MUST BE INCLUDED WITH THE APPROVED DRAWINGS TO PREVENT ANY DELAYS IN THE SHIPMENT OF MATERIALS.
- 6) .060 ACROVYN WALL COVER IS AVAILABLE IN ANY OF C/S 60 STANDARD COLORS.

INSTALLATION NOTES:

- 1) WAINSCOT TRIM QUANTITY IS CALCULATED FOR WAINSCOT USE ONLY. NOT FOR EDGE TRIM.
- 2) INSIDE CORNER TRIM QUANTITY IS BASE ON WHERE SHEET IS ON ADJOINING WALLS
- 3) OUTSIDE CORNER TRIM QUANTITY IS BASED ON SHEET ON BOTH WALLS AT CORNER.

MATERIAL TO BE SUPPLIED IN 4'x8' OR 4'x10' SHEETS

NO. 4'x 8' SHEETS REQ'D. (25S001XXX): \_\_\_\_\_

NO. 4'x 10' SHEETS REQ'D. (25S018XXX): \_\_\_\_\_

# .060 ACROVYN AT PARTIAL HEIGHT

**C/S GROUP**

MUNCY, PA 17756  
MISSISSAUGA, ONTARIO, CANADA

PROJECT:

REV.

LOCATION:

F&F

CUSTOMER:

SHEET OF

AGENT:

JOB NO.

DWG. BY:

DATE: