



Acrovyn®

Door & Frame Cladding, DNP & D1 UL Specifications



SPECIFICATION DATA

TEST STANDARD

UL-10B

UL® CLASSIFICATION

3-Hour Rating	Acrovyn cladding material for door frames and D1 frame guard on UL listed pressed steel door frames with hollow metal or steel covered composite swinging-type fire doors rated up to 3 hours.
1-1/2 Hour Rating	Acrovyn cladding material for door frames and D1 frame guard on UL listed pressed steel door frames with wood covered composite or wood core fire doors rated up to 1-1/2 hours.
3-Hour Rating	Acrovyn kick and push plates, cladding material for doors and door knob protectors on hollow metal or steel covered composite swinging-type fire doors rated up to 3 hours.
1-1/2 Hour Rating	Acrovyn kick and push plates, cladding material for doors and door knob protectors on wood covered composite or wood core fire doors rated up to 1-1/2 hours.

Acrovyn cladding may be either full or partial height on frames and doors.

UL® DIRECTORY REFERENCE

- Fire Resistance Directory (1998 or Current Year)
- Cladding Materials for Doors and Frames (GVUZ)
- UL® Fire Number R-11776

NATIONAL CODE REFERENCE

- BOCA (Sec. 913.4.2)
- Life Safety Code (NFPA 251)
- Uniform Building Code (Sec. 7.1)

MATERIAL RATING


- = 1-1/2 & 3 Hour Rating (see explanation above)
- = 1-1/2 & 3 Hour Rating (see explanation above)
- = 1-1/2 & 3 Hour Rating (see explanation above)

RESTRICTIONS

- Applications and hourly ratings as per the above.
- Must be installed with Acrovyn Interiors Water Based Contact Adhesive or MacTac IB 2100 or IB 1184 pressure sensitive adhesive.

UL® MARKING (LABEL)

- 1 Label per individual unit.

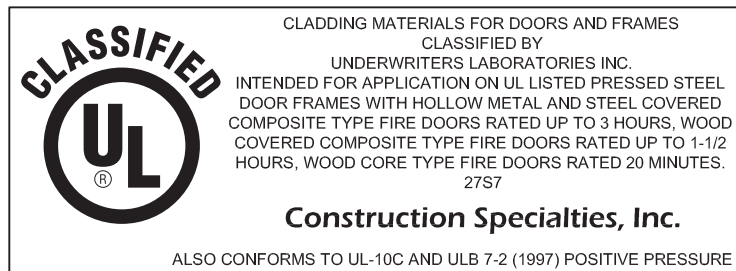

To download details, specs & photos visit www.c-sgroup.com
For technical and design assistance call 800-233-8493.

©Copyright 2008 Construction Specialties, Inc.

Construction Specialties, Inc. reserves the right to make design changes or withdraw any design without notice.