

## C1-DFPN and C2-DFPN

Resilient Acrovyn elevator door frame guards supplied factory formed or for field radius.

### Product Data

### Technical Data:

- .040" (1.02mm) thick Acrovyn sheet
- Material cut to specified dimensions from 4' x 8' (1.2m X 2.4m) or 4' x 10' (1.2m x 3.0m) sheet
- 4' (1.2m) height standard; full and other heights available
- Adhesive mount

### Features:


- Suede texture Acrovyn
- Engineered PETG free of PVC and PBTs
- 5 year product warranty
- Chameleon™ limited lifetime warranty

### Options:


- C1-DFPN - factory-formed return legs; field radiused to the elevator door frame
- C2-DFPN - factory formed to specified radius



Solid Colors | Chameleon Patterns

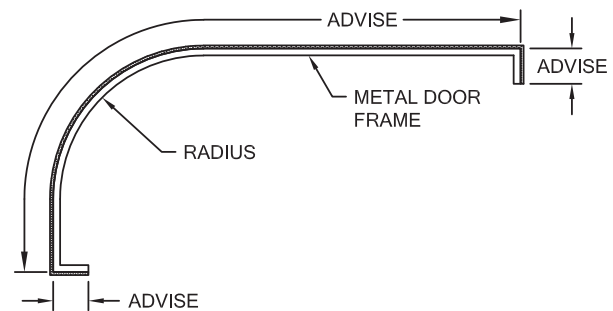

C-1 DFPN

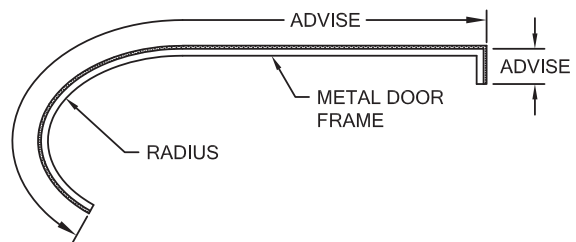

C-2 DFPN

## SUGGESTED SPECIFICATIONS SECTION 10 26 00

### CS Acrovyn 4000 Models C1-DFPN and C2-DFPN

#### Part 1 - General

##### 1.01 Summary

**A.** This section includes the following types of wall coverings:

1. Door Protection

**B.** Related Sections: The following sections contain requirements related to this section:

1. Handrails, Corner Guards, Bumper Guards, Crash Rails, Accent Rails, Wall Covering, Wall Panels; refer to section 10260 "Wall and Door Protection"

##### 1.02 References

**A.** National Codes (IBC, UBC, SBCCI and BOCA)

**B.** American Society for Testing and Materials (ASTM)

##### 1.03 Submittals

General: Submit the following in accordance with conditions of contract and Division 1 specification section 01300:

**A.** Product data and detailed specifications for each system component and installation accessory required, including installation methods for each type of substrate.

**B.** Shop drawings showing locations, extent and installation details of door protection products.

**C.** Samples for verification purposes: Submit the following samples, as proposed for this work, for verification of color, texture, pattern and thickness:

1. Sample of each product specified.

**D.** Product test reports from a qualified independent testing laboratory showing compliance of each component with requirements indicated.

**E.** Maintenance data for door protection system components for inclusion in the operating and maintenance manuals specified in Division 1.

##### 1.04 Quality Assurance

**A.** Installer qualifications: Engage an installer who has no less than 3 years experience in installation of door protection products similar in complexity to those required for this project.

**B.** Manufacturer's qualifications: Not less than 5 years experience in the production of specified products and a record of successful in-service performance.

**C.** Code Compliance: Door protection products should conform to all applicable codes including IBC, UBC, SBCCI and BOCA.

**D.** Chemical and stain resistance: Provide door protection products with chemical and stain resistance in accordance with ASTM D543.

**E.** Color Match: Provide door protection products that are color matched in accordance with the following:

1. Delta Ecmc of no greater than 1.0 using CIE Lab color space. (Specifier note: Construction Specialties' colors are matched under cool white fluorescent lighting and computer controlled within manufacturing tolerances. Color may vary if alternate lighting sources are present.)

**F.** Single source responsibility: Provide all components of the wall protection system manufactured by the same company to ensure compatibility of color, texture and physical properties.

#### 1.05 Delivery, Storage and Handling

**A.** Deliver materials to the project site in unopened original factory packaging clearly labeled to show manufacturer.

**B.** Store materials in original, undamaged packaging in a clean, dry place out of direct sunlight and exposure to the elements. A room temperature of 40-100°F (4-38°C) should be maintained.

**C.** Materials must be stored flat.

#### 1.06 Project Conditions

**A.** Materials must be acclimated in an environment of 65-75°F (18-24°C) for at least 24 hours prior to beginning the installation.

**B.** Installation areas must be enclosed and weatherproofed before installation commences.

#### Part 2 - Products

##### 2.01 Manufacturers

**A.** Interior surface protection products specified herein and included on the submittal drawings shall be manufactured by Construction Specialties, Inc.

##### 2.02 Materials

**A.** Engineered PETG: Material should be high-impact Acrovyn 4000 with Suede texture and nominal .040" (1.02mm) thickness. Chemical and stain resistance should be per ASTM D543 standards as established by the manufacturer. Colors to be indicated in the finish schedule from one of manufacturer's available colors and patterns.

##### 2.03 Door Protection

**A.** Elevator Door Frame Protection to be CS Acrovyn: Material shall be formed and supplied with field-applied adhesive.

**1. Model C1-DFPN One-piece elevator door frame protector manufactured from .040" (1.02mm) thick Acrovyn sheeting. With factory-formed return legs, the sheet is custom formed in the field to the radius configuration of elevator door frames. Supplied in standard 4' (1.1m) height; custom or full height available. Select from one of Acrovyn solid colors or Chameleon simulated patterns.**

**2. Model C2-DFPN One-piece elevator door frame protector manufactured from .040" (1.02mm) thick Acrovyn sheeting completely factory formed to the specified radius configuration of elevator door frames. Supplied in standard 4' (1.1m) height; custom or full height available. Select from one of Acrovyn solid colors or Chameleon simulated patterns.**

##### 2.04 Fabrication

**A.** General: Fabricate door protection products to comply with requirements indicated for design, dimensions, detail, finish and sizes.

##### 2.05 Accessories

**A.** Adhesive: Acrovyn door frame protection shall be furnished as a complete packaged system, including appropriate adhesive.

#### Part 3 - Execution

##### 3.01 Examination

**A.** Verification of conditions: Examine areas and conditions under which work is to be performed and identify conditions detrimental to proper or timely completion.

1. Do not proceed until unsatisfactory conditions have been corrected.

##### 3.02 Preparation

**A.** Surface preparation: Prior to installation, clean substrate to remove dirt, debris and loose particles. Perform additional preparation procedures as required by manufacturer's instructions.

**B.** Protection: Take all necessary steps to prevent damage to material during installation as required in manufacturer's installation instructions.

##### 3.03 Installation

**A.** Install the work of this section in strict accordance with the manufacturer's recommendations using approved adhesive and locating all components firmly into position, level and plumb.

**B.** Temperature at the time of installation must be between 65-75°F (18-24°C) and be maintained for at least 48 hours after the installation, to allow for proper adhesive set up.

**C.** Relative humidity shall not exceed 80%.

**D.** Do not expose door protection to direct sunlight during or after installation. This will cause the surface temperature to rise, which in turn will cause bubbles and delamination.

##### 3.04 Cleaning

**A.** General: Immediately upon completion of installation, clean door protection products and accessories in accordance with manufacturer's recommended cleaning method.

**B.** Remove surplus materials, rubbish and debris resulting from installation as work progresses and upon completion of work.