
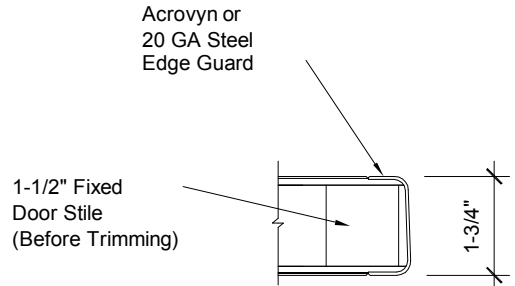


C/S Acrovyn®

U.S. Design Patents: D512,785S;
D515,713S; D517,224S; D517,701S
D518,185S

Acrovyn Doors System (90 Minute Fire Rated - Category A)

Temperature Rise 250° F
UBC 7-2, UL-10C 1998, CAN4S104 1995 & NFPA 252 1999
Door Installation: NFPA 80
WDMA I.S.1A-04:

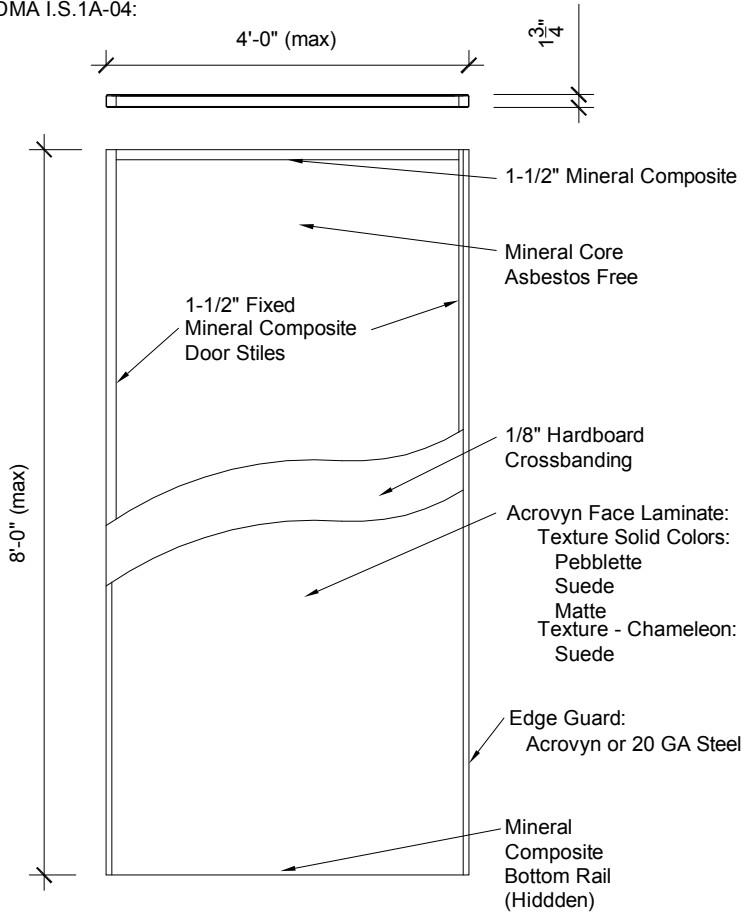


Door Stile Detail

Notes:

- 5" Top and Bottom Rails Available.
- 5" x 10" Lock Blocks Available
- 10" Center Rail
- 5" x 10" Corner Blocks Available
- Vision Panels Available. (min 5-1/2" from edge / openings)
- Labeled Glass 1296 sq in (36"W or 54"H)
- Standard Bevel: 1/16" in 2"
- Face Assembly Adhesive: Type 1
- Core Assembly Adhesive: Type 2
- Stainless Steel Kick Plate Available, 48" High Max.

Door Details

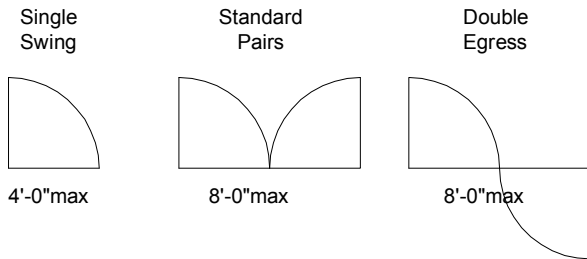

Door Configuration / Max Size

PROJECT:	SCALE: N.T.S.	DATE:
CUSTOMER:	SUB. BY:	SHT.
LOCATION:	JOB NO:	COPYRIGHT 2005 THE C/S GROUP OF COMPANIES



3 Werner Way · Lebanon, NJ 08833 · (800) 972-7214
895 Lakefront Promenade · Mississauga, Ontario L5E 2C2 Canada · (905) 274-3611
email: acrovyn@cs-cgroup.com
Construction Specialties, Inc. reserves the right to make design changes or to withdraw any design without notice.