

PEDITRED LP WITH THRESHOLD FRAME







INSERT STYLE:

INSERT COLOR:

CATALOG NUMBER: G3


PART NUMBER:

| | | | |
|-----|-------------|------|----|
| NO. | REVISION | DATE | BY |
| NO. | F&F RELEASE | DATE | BY |
| | | | |
| | | | |


- | | | | | | |
|---|---|---|---|---|---|
|  |  |  |  |  |  |
| RECYCLED RUBBER | EXTERIOR CARPET | HEAVY-DUTY CARPET | VINYL | VINYL-ABRASIVE | POURED ABRASIVE INSERT |
| G3RR 19R001XXX | G3EC 19C018XXX | G3HC 19C010XXX | G3V 19V002XXX | G3VA 19M001XXX | G3PA 19A005XXX |

PEDITRED LP INSERT STYLES

FIELD NOTE: DIM 'B' TO BE TAKEN FROM FACE OF DOOR THRESHOLD TO DOOR THRESHOLD.

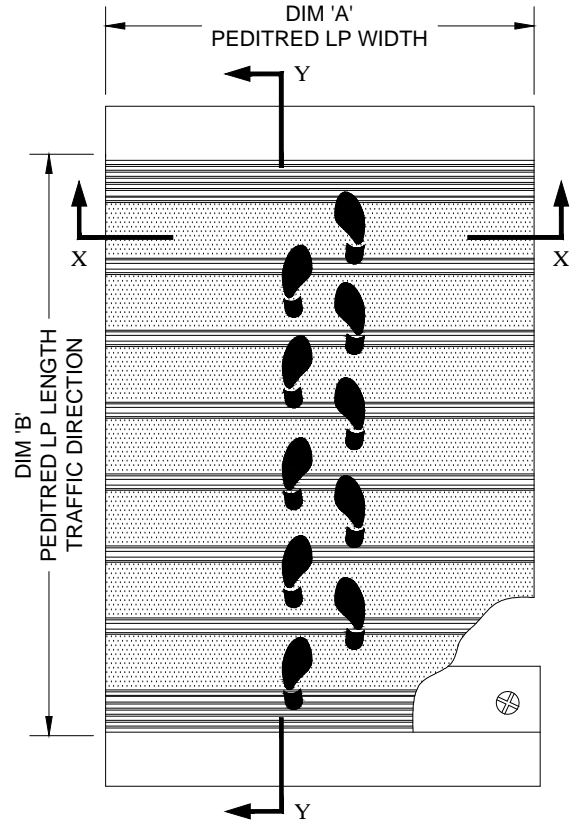

TYPICAL PLAN VIEW

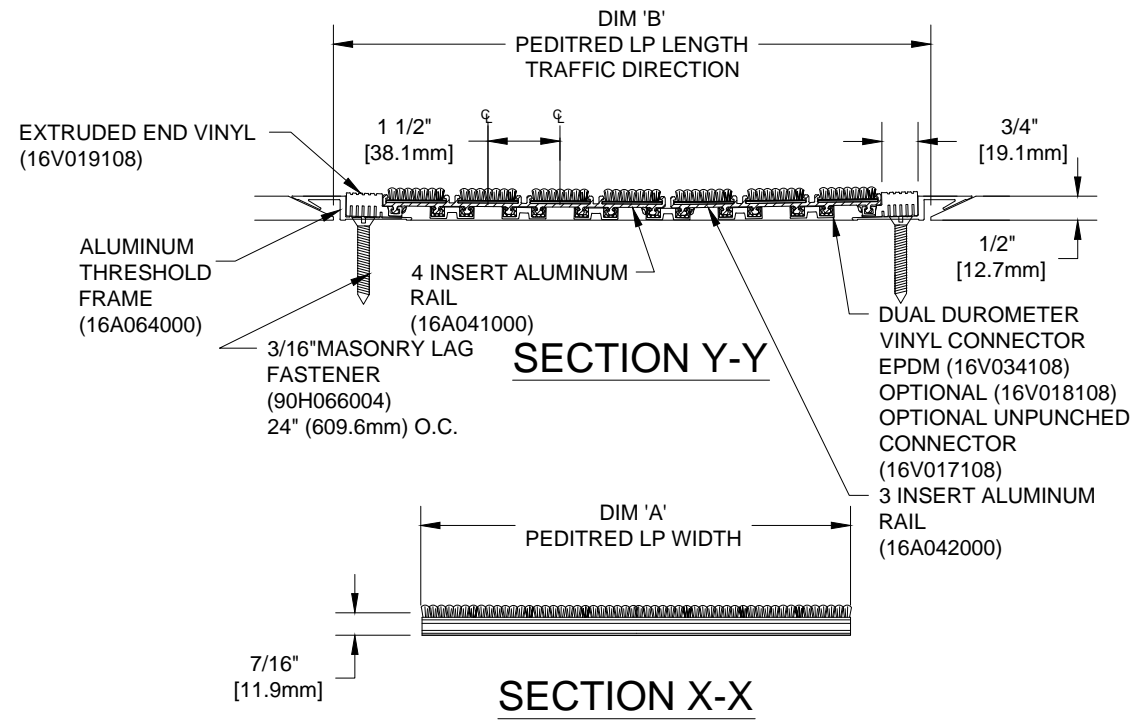

SECTION Y-Y

SECTION X-X

NOTES:

*ALL SURFACES IN CONTACT WITH MASONRY ARE TO RECEIVE A COAT OF ZINC CHROMATE PRIMER

*PLEASE VERIFY TRAFFIC DIRECTION

*PEDITRED LP SHALL BE ABLE TO SUPPORT A 750 LB. ROLLING LOAD.

*MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M) IN WIDTH (DIM 'A') OR 100 SQUARE FEET

*ADDITIONAL SPECIFICATIONS ARE CONTAINED IN THE LATEST C/S CATALOG OR AT C-SGROUP.COM AND ARE CONSIDERED PART OF THIS TRANSMITTAL.

*SUPPLIED IN STANDARD MILL FINISH. (OPTIONAL FINISHES AVAILABLE AT ADDITIONAL COST)



 6896 Route 405 Highway, Muncy PA 17756
 (800) 233-8493 *Fax (570) 546-4892 www.c-sgroup.com

| PLEASE VERIFY ALL | QTY | MARK # | LOCATION | MODEL | DIM 'A' WIDTH | DIM 'B' LENGTH | FINISH | NOTES |
|-------------------|-----|--------|----------|-------|---------------|----------------|--------|-------|
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

| | | |
|-------------|-------|----------|
| PROJECT: | | |
| LOCATION: | | |
| CONTRACTOR: | | |
| AGENT: | | SHT: |
| DRG. BY: | DATE: | JOB NO.: |