

PEDITRED LP WITH THRESHOLD FRAME







INSERT STYLE:

INSERT COLOR:


CATALOG NUMBER: G3

PART NUMBER:

NO.	REVISION	DATE	BY
NO.	F&F RELEASE	DATE	BY

					
RECYCLED RUBBER G3RR 19R001XXX	EXTERIOR CARPET G3EC 19C018XXX	HEAVY-DUTY CARPET G3HC 19C010XXX	VINYL G3V 19V002XXX	VINYL-ABRASIVE G3VA 19M001XXX	POURED ABRASIVE INSERT G3PA 19A005XXX


PEDITRED INSERT STYLES

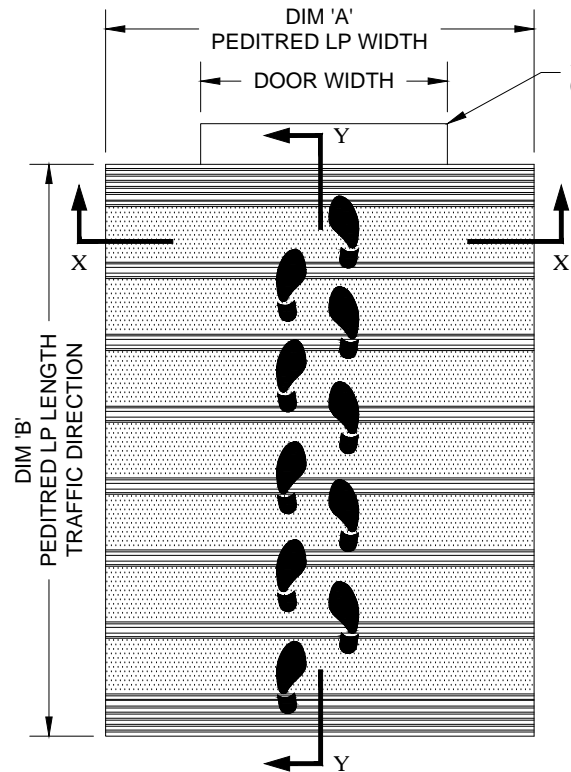

TYPICAL PLAN VIEW

ALUMINUM THRESHOLD FRAME (BOTH ENDS IF REQUIRED)

EXTRUDED END VINYL (16V019108)
4 INSERT ALUMINUM RAIL (16A041000)

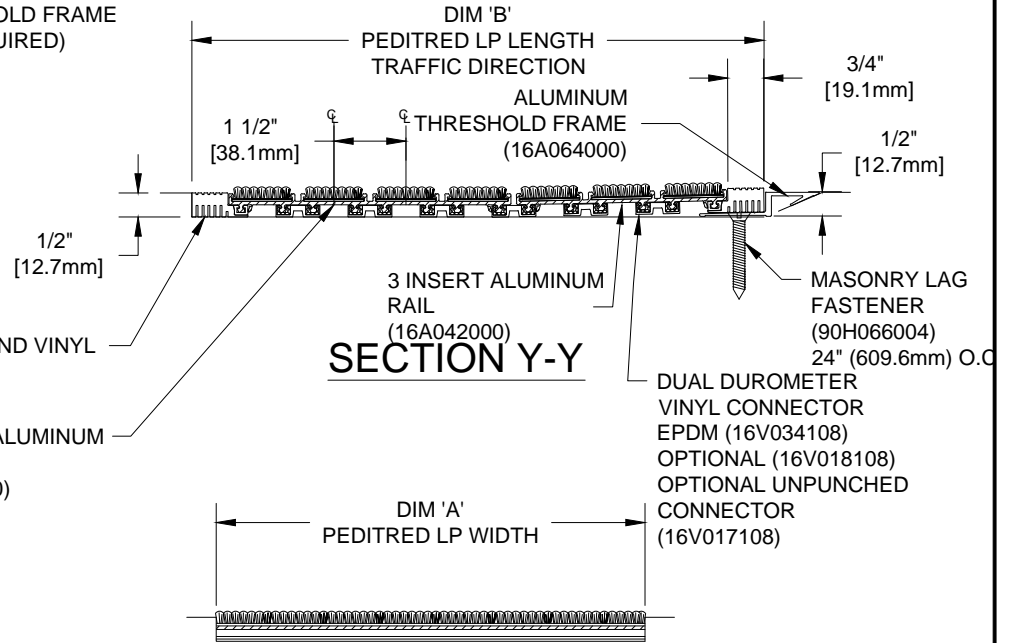

SECTION Y-Y

SECTION X-X

NOTES:

- *ALL SURFACES IN CONTACT WITH MASONRY ARE TO RECEIVE A COAT OF ZINC CHROMATE PRIMER
- *PLEASE VERIFY TRAFFIC DIRECTION
- *PEDITRED LP SHALL BE ABLE TO SUPPORT A 750 LB. ROLLING LOAD.

- *MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M) IN WIDTH (DIM "A") OR 100 SQUARE FEET
- *ADDITIONAL SPECIFICATIONS ARE CONTAINED IN THE LATEST C/S CATALOG OR AT C-SGROUP.COM AND ARE CONSIDERED PART OF THIS TRANSMITTAL.

*SUPPLIED IN STANDARD MILL FINISH. (OPTIONAL FINISHES AVAILABLE AT ADDITIONAL COST)


 6896 Route 405 Highway, Muncy PA 17756
 (800) 233-8493 *Fax (570) 546-4892 www.c-sgroup.com

PLEASE VERIFY ALL	QTY	MARK #	LOCATION	MODEL	DIM 'A' WIDTH	DIM 'B' LENGTH	FINISH	NOTES

PROJECT:		
LOCATION:		
CONTRACTOR:		
AGENT:		SHT:
DRG. BY:	DATE:	JOB NO.: