

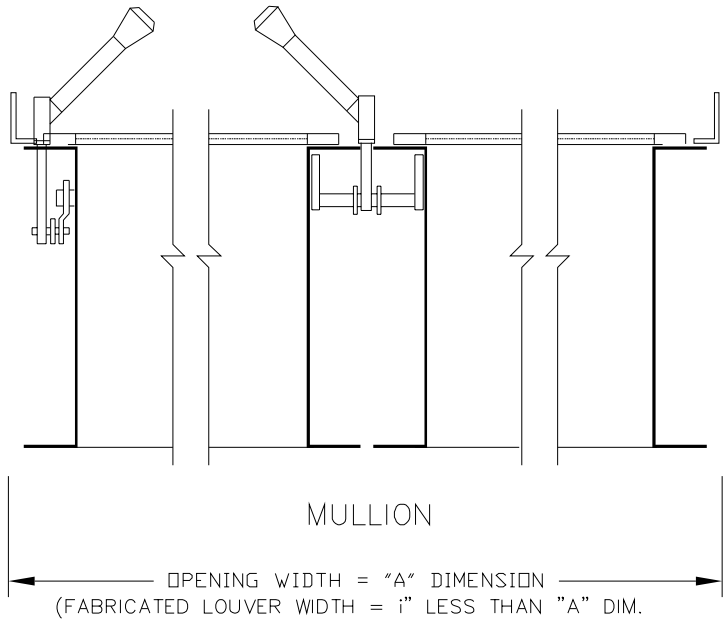


ACOUSTICAL MULLION LOUVERS – MODEL A12970

LOUVER FURNISHED WITH 2"x1"xe" ALUM.
CLIP ANGLES 24" O.C.

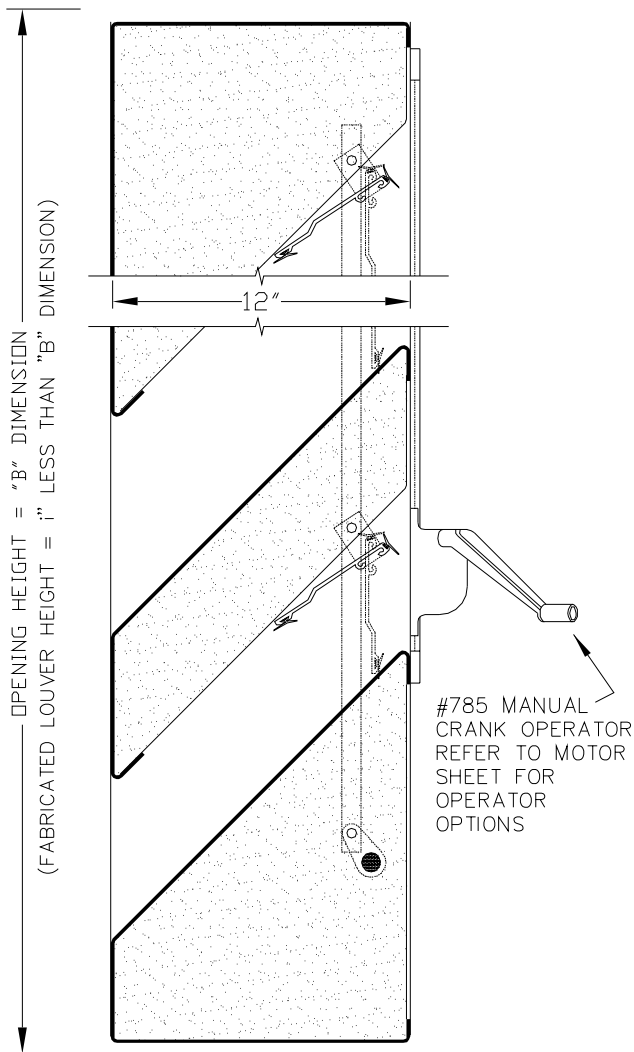

SCREENS

- SCREEN NOT REQUIRED
- SCREEN REQUIRED
- INTERIOR MOUNTED
- EXTERIOR MOUNTED
- BIRDSCREEN (i" MESH)
- INSECT SCREEN (18 X 16 MESH)

FINISHES

- STANDARD MILL
- FLUOROPOLYMER POWDER COAT
- ARCHITECTURAL CLASS I BRONZE ANODIC COATING
- 204-R1 CLEAR ANODIZE
- OTHER _____

SILL EXTENSIONS

- * SETBACK DIM = 0"-3 i"
- * SETBACK DIM = 3s"-6"

C/S EXTRUDED ALUMINUM OPERATING ACOUSTICAL LOUVER MODEL A12970. FRAMES AND BLADES TO BE FABRICATED FROM 6063-T5 ALLOY, WITH REINFORCING BOSSES AND A NOMINAL .081" MATERIAL THICKNESS. EXTRUDED OPERATING BLADE TO BE NOMINAL w" THICK.

ALL FASTENERS TO HAVE A CORROSION RESISTANT COATING.
UN-SUPPORTED BLADE LENGTH = 5'-0" @ 20 PSF

SCALE = 1i"=1'-0"

MARK	QTY.	"A" DIM.	"B" DIM.	NUMBER OF MULLIONS	OPERATOR LOCATION	LOCATION	REMARKS

Construction Specialties, Inc.
55 Winans Avenue
Cranford, New Jersey 07016
(908) 272-5200
Fax (908) 272-5844

PROJECT:	DRAWN BY:
CUSTOMER:	DATE:
ARCH'T:	DWG. NO:
AGENT:	SHEET OF