STEEL LOUVERS – MODEL GS–607

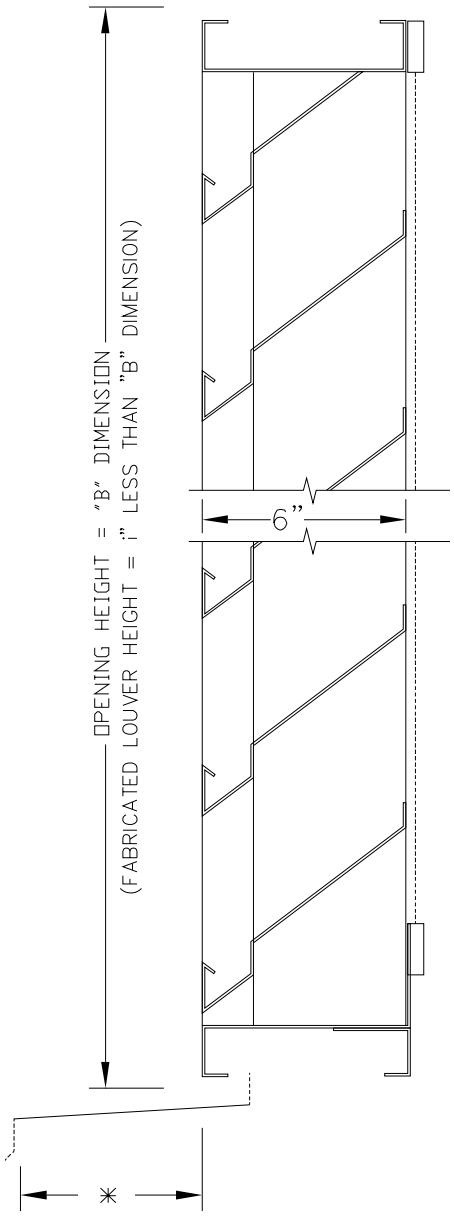

OPTIONAL 20ga.
STEEL SILL

LOUVER FURNISHED WITH 1i"x1i"x16GA. STEEL
CLIP ANGLES 24" O.C. (JAMBS ONLY) (MIN. 2 PER JAMB)

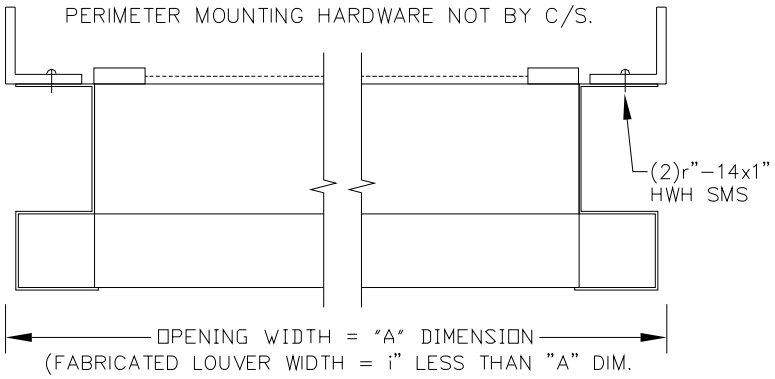

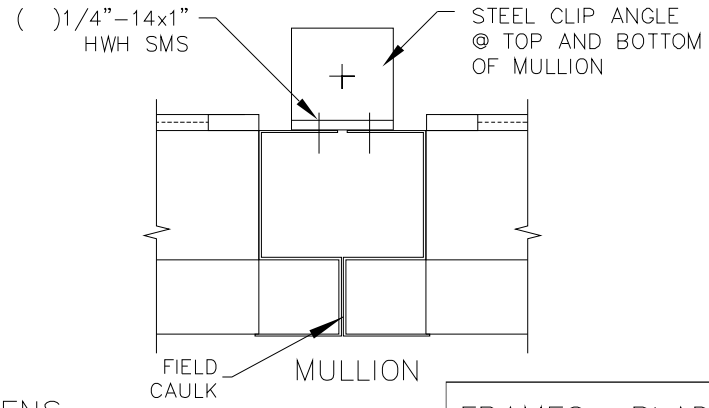

SCREENS

- ☐ SCREEN NOT REQUIRED
- ☐ SCREEN REQUIRED
- ☐ INTERIOR MOUNTED
- ☐ EXTERIOR MOUNTED
- ☐ BIRDSCREEN (i" MESH ALUM.)
- ☐ INSECT SCREEN (18x16 MESH ALUM.)

FRAMES	BLADES
☐ 16ga.	☐ 16ga.
☐ 18ga.	☐ 18ga.
☐ 20ga.	☐ 20ga.

FINISHES

- ☐ STANDARD GALVANNEALED
- ☐ FLUOROPOLYMER POWDER COAT

SILL EXTENSIONS

- ☐ * SETBACK DIM = 0"–3i"
- ☐ * SETBACK DIM = 3s"–6"

C/S FORMED FIXED DRAINABLE BLADE LOUVER MODEL GS–607.
FRAMES AND BLADES TO BE FABRICATED FROM GALVANNEALED SHEET, THICKNESS AS SELECTED.
UNLESS SPECIFIED ABOVE, STANDARD BLADE THICKNESS TO BE 18ga. AND STANDARD FRAME THICKNESS TO BE 20ga.
ALL WELDED CONSTRUCTION.
ALL FASTENERS TO BE STAINLESS STEEL
UN–SUPPORTED BLADE LENGTH = @ PSF

MARK	QTY.	"A" DIM.	"B" DIM.	NUMBER OF MULLIONS	LOCATION	REMARKS
						CKD. BY:

Construction Specialties, Inc.
49 Meeker Avenue
Cranford, New Jersey 07016
(908) 272–5200
Fax (908) 272–6038

PROJECT:	DRAWN BY:
CUSTOMER:	DATE:
ARCH'T:	DWG. NO:
AGENT:	SHEET OF