



STORM RESISTANT LOUVERS – MODEL RS-4300


LOUVER FURNISHED WITH 1 1/2" x 1 1/2" x e" ALUM.
CLIP ANGLES 24" O.C. (JAMBS ONLY) (MIN. 2 PER JAMB)

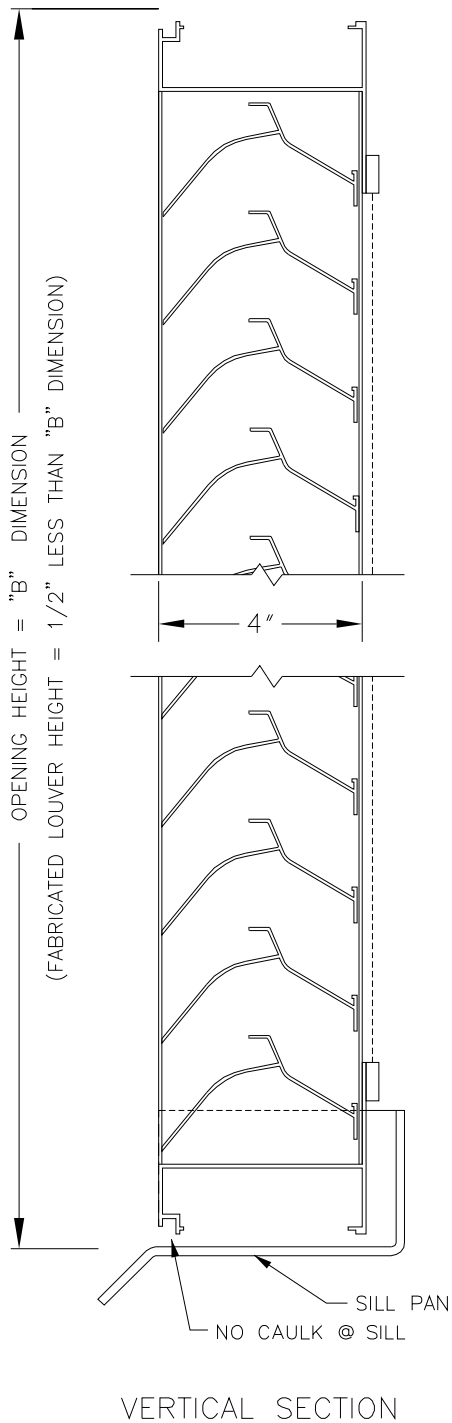

VERTICAL SECTION

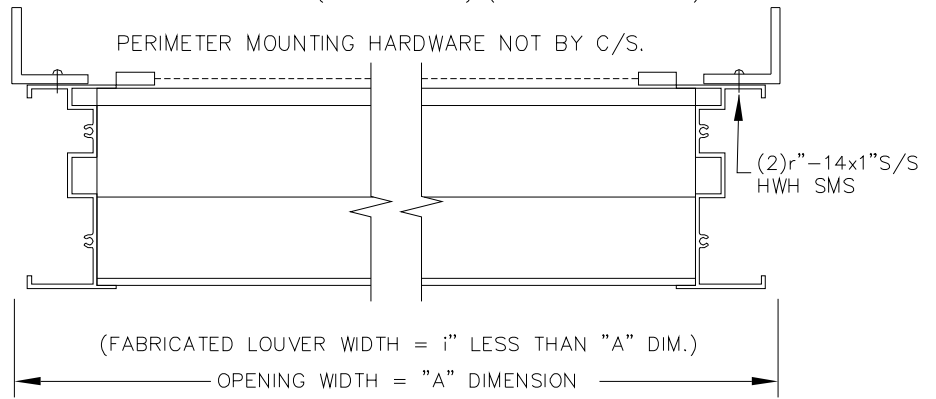

PLAN VIEW

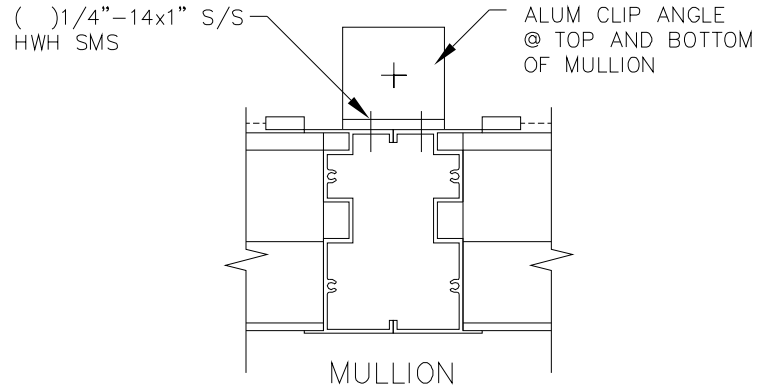

SCREENS

- SCREEN NOT REQUIRED
- SCREEN REQUIRED
- INTERIOR MOUNTED
- EXTERIOR MOUNTED
- BIRDSCREEN (1/2" MESH)
- INSECT SCREEN (18x16 MESH)

FINISHES

- STANDARD MILL
- FLUOROPOLYMER POWDER COAT
 - (1) OF C/S STD. COLORS
 - CUSTOM COLOR, C/S REQUIRES A COLOR CHIP FOR MATCHING
- ARCHITECTURAL CLASS I (DK. OR MED.) BRONZE ANODIC COATING
- 204-R1 CLEAR ANODIZE
- OTHER _____

C/S EXTRUDED ALUMINUM STORM RESISTANT DRAINABLE SIGHTPROOF 4" DEEP LOUVER MODEL RS-4300. FRAMES AND BLADES TO BE FABRICATED FROM 6063-T5 ALLOY. FRAME COMPONENTS TO HAVE A NOMINAL .081" MATERIAL THICKNESS. BLADES TO HAVE A .060" MATERIAL THICKNESS.

ALL FASTENERS TO BE STAINLESS STEEL.

UNSUPPORTED BLADE LENGTH = @ PSF.

MARK	QTY.	"A" DIM.	"B" DIM.	NUMBER OF MULLIONS	LOCATION	REMARKS
						CKD. BY:

Construction Specialties, Inc.
49 Meeker Avenue
Cranford, New Jersey 07016
(908) 272-5200
Fax (908) 272-6038

PROJECT:

DRAWN BY:

CUSTOMER:

DATE:

ARCH'T:

DWG. NO:

AGENT:

SHEET OF