

PEDITRED LP WITH NO FRAME

INSERT STYLE:

INSERT COLOR: PLEASE ADVISE


CATALOG NUMBER: G3

PART NUMBER:


NO.	REVISION	DATE	BY
NO.	F&F RELEASE	DATE	BY

- |  |  |   |   |  |   |   |
|--|--|---|---|--|---|---|
|  RECYCLED RUBBER<br>G3RR<br>19R005XXX |  EXTERIOR CARPET<br>G3EC<br>19C018XXX |  HEAVY-DUTY CARPET<br>G3HC<br>19C010XXX<br>19C022XXX |  RUBBER<br>G3V<br>19V022501<br>#8501 BLACK |  VINYL ABRASIVE<br>G3VA<br>19A007XXX<br>19M001XXX |  SERRATED ALUM. INSERT<br>G3SAI<br>19A004001 |  POURED ABRASIVE INSERT<br>G3PA<br>19A005XXX |
|--|--|---|---|--|---|---|


PEDITRED INSERT STYLES

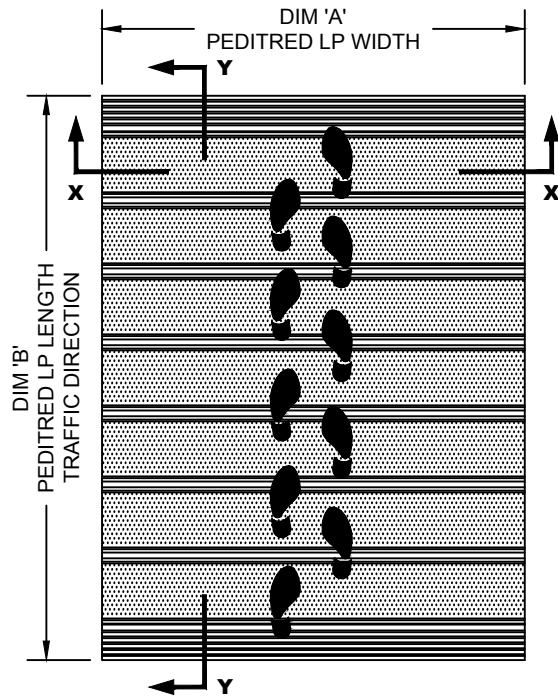

TYPICAL PLAN VIEW

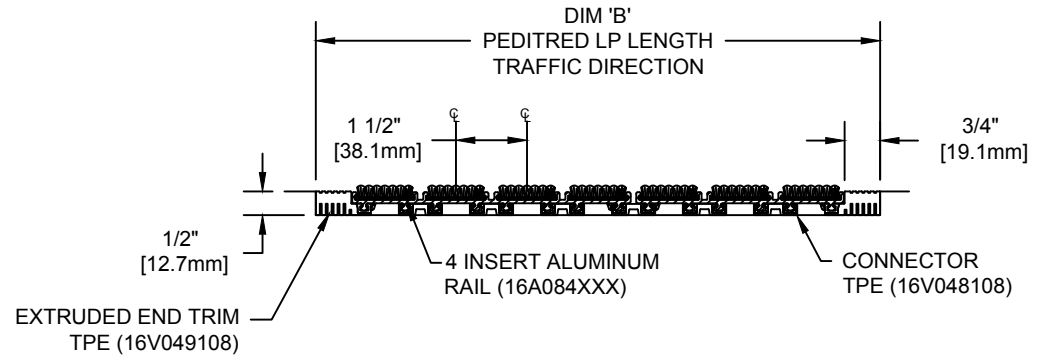

SECTION Y-Y

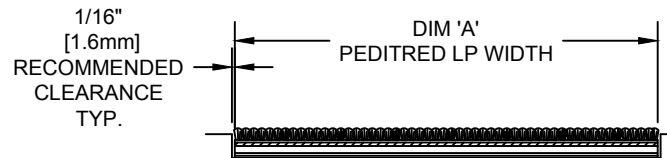

SECTION X-X

NOTES:

\*ALL SURFACES IN CONTACT WITH MASONRY ARE TO RECEIVE A COAT OF ZINC CHROMATE PRIMER

\*MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M) IN WIDTH (DIM "A") OR 3'-0" [.91M] IN LENGTH (DIM "B").

\*PLEASE VERIFY TRAFFIC DIRECTION

\*ADDITIONAL SPECIFICATIONS ARE CONTAINED IN THE LATEST C/S CATALOG OR AT C-SGROUP.COM AND ARE CONSIDERED PART OF THIS TRANSMITTAL.

\*PEDITRED LP SHALL BE ABLE TO SUPPORT A 750 LB. ROLLING LOAD.

**CS Construction Specialties™**  
 6696 Route 405 Highway, Muncy PA 17756  
 (800) 233-8493 • Fax (570) 546-4692 • www.c-sgroup.com

PLEASE VERIFY ALL	QTY	MARK #	LOCATION	MODEL	DIM 'A' WIDTH	DIM 'B' LENGTH	FINISH	NOTES

PROJECT:		
LOCATION:		
CONTRACTOR:		
AGENT:		SHT:
DRG. BY:	DATE:	JOB NO.: