

PEDITRED LP WITH THRESHOLD FRAME (WHERE NEEDED)





INSERT STYLE:

INSERT COLOR: PLEASE ADVISE


CATALOG NUMBER: G3

PART NUMBER:


NO.	REVISION	DATE	BY
NO.	F&F RELEASE	DATE	BY

 RECYCLED RUBBER G3RR 19R005XXX	 EXTERIOR CARPET G3EC 19C018XXX	 HEAVY-DUTY CARPET G3HC 19C010XXX 19C022XXX	 RUBBER G3V 19V022501 #8501 BLACK	 VINYL ABRASIVE G3VA 19A007XXX 19M001XXX	 SERRATED ALUM. INSERT G3SAI 19A004001	 Poured ABRASIVE INSERT G3PA 19A005XXX
--	--	---	---	--	---	---


PEDITRED INSERT STYLES

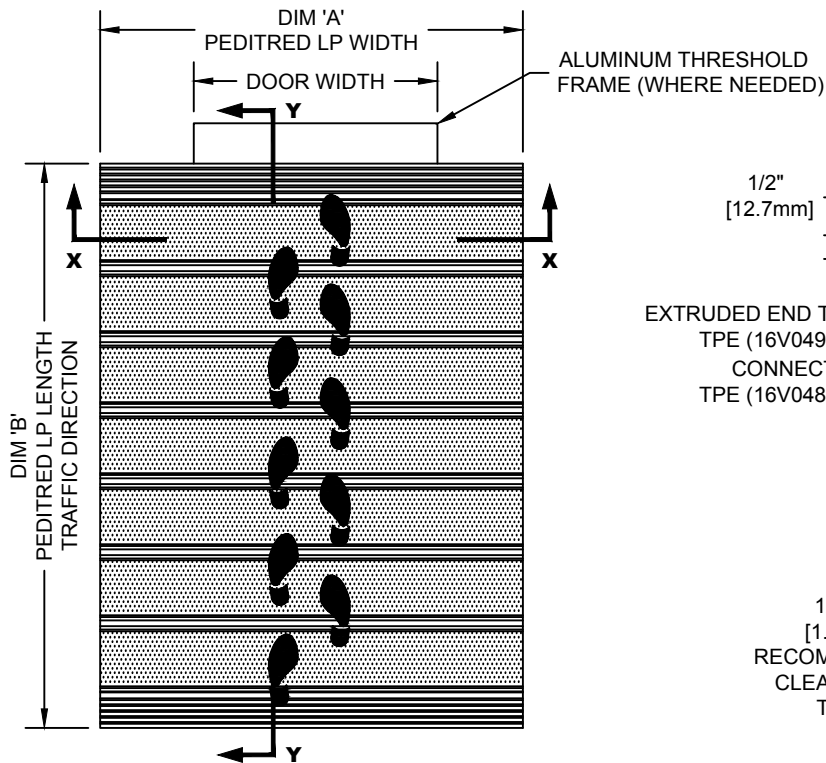

TYPICAL PLAN VIEW

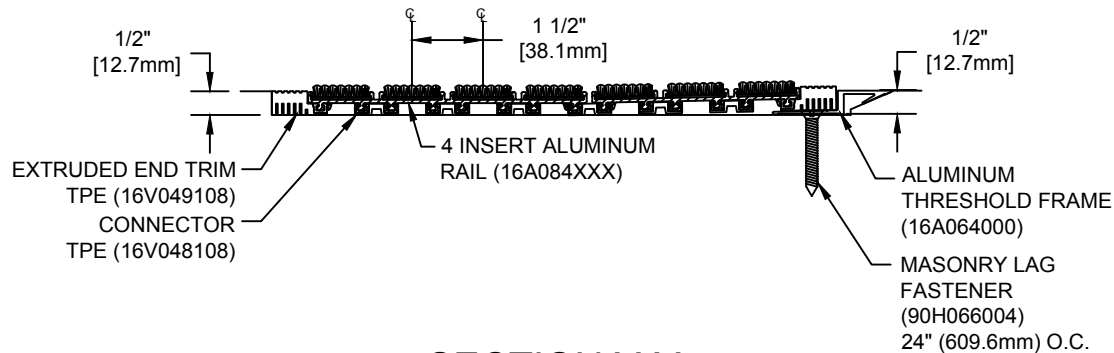

SECTION Y-Y

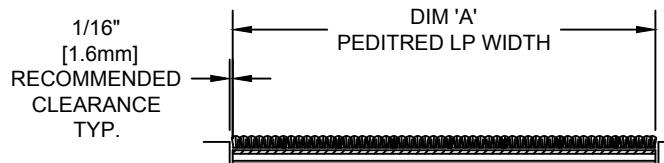

SECTION X-X

NOTES:

\*ALL SURFACES IN CONTACT WITH MASONRY ARE TO RECEIVE A COAT OF ZINC CHROMATE PRIMER

\*PLEASE VERIFY TRAFFIC DIRECTION

\*PEDITRED LP SHALL BE ABLE TO SUPPORT A 750 LB. ROLLING LOAD.

\*MAX. SINGLE GRID SIZE NOT TO EXCEED 12'-0" (3.66M) IN WIDTH (DIM "A") OR 3'-0" (.91M) IN LENGTH (DIM "B").

\*ADDITIONAL SPECIFICATIONS ARE CONTAINED IN THE LATEST C/S CATALOG OR AT C-SGROUP.COM AND ARE CONSIDERED PART OF THIS TRANSMITTAL.

 **Construction Specialties™**  
 6696 Router 405 Highway, Muncy PA 17756  
 (800) 233-8493 • Fax (570) 546-4692 • www.c-sgroup.com

PLEASE VERIFY ALL	QTY	MARK #	LOCATION	MODEL	DIM 'A' WIDTH	DIM 'B' LENGTH	FINISH	NOTES

PROJECT:		
LOCATION:		
CONTRACTOR:		
AGENT:		SHT:
DRG. BY:	DATE:	JOB NO.: