

General Information

Open the pack list on the crate's exterior. Locate the shop drawings and installation instruction inside the box. Review contents and make sure all parts are present. For a rectangular installation, the pack list will include the number of modules and frame pieces. For odd-shaped installations, a drawing will be supplied identifying the module layout in numbered sequence.

If you discover that material is missing or defective, contact our customer service department immediately: **800.233.8493**

Important Notes - Do Not Overlook

Prior to installation, ensure that the material is stored indoors and has acclimated to the environment's temperature for 24 hours.

Assess the site condition prior to installation ensuring the recess is:

- Free of debris and moisture
- The correct depth throughout
- Smooth and flat

High spots should be ground down. Low spots should be filled with a self-leveling grout. The side walls of the recess should also be checked for plumb and defects as this could affect the frame installation (if applicable). If these conditions have been met, you can begin the installation.

Tools Required

Tools needed: a level, rubber mallet, 5/16" masonry drill bit, flathead screwdriver, #2 Phillips-head screwdriver, tape measure, carpenter's pencil or marker, utility knife, shop vacuum and PPE (gloves, glasses, ear protection, etc.).

Installation Instructions



1 Start by dry fitting all frame pieces within the area and use a tape measure to ensure a proper fit. For odd-shaped layouts, match frame tags to the drawing on the pack list.



2 Using a straight edge, ensure the top frame edge is flush with the surrounding floor surface. Shim frame every 24" if necessary to achieve required height.



3 Using the 5/16" masonry bit, drill into the concrete 24" on center. Fasten the frame with the supplied masonry anchors using a #2 Phillips-head screwdriver.

Installation Instructions (continued)



4 To make the sub-floor level with the bottom frame leg, use non-shrink grout and trowel flush with the top of the bottom leg of the level base frame.



5 The recess should be smooth and flat when complete.



6 Use a rag to clean the excess grouting from the top of the frame leg. **Allow 24 hours for the grout to dry** before continuing with the installation.



7 For layout sequence of the mat units with multiple sections, refer to the shop drawings and the mark numbers placed on the backside of the mats.



8 Unroll the mats and place into the recess per the drawing layout.



9 Align the mat into the recess.



10 Cut the oversized end trim flush to the edge of the rail.



11 For proper overall fit, adjust the end trim using a utility knife with a new, sharp blade. Remove excess trim equally at both ends. The end trim has grooves every 1/8" that you can use to run the blade across.



12 For beginners: we recommend using a straight edge to assist in cutting an accurate line. Once the end trim is adjusted, tuck the mat into the recess and push flat.

To view details, specs and product info visit www.c-sgroup.com/efs.

For technical and design assistance call 800.233.8493

Installation Instructions (continued)




13 Repeat steps 8 -12 for adjacent sections.



14 Scuff or drag your heel to align the mat. It may be necessary to lift and flap/shake the mat for final alignment.



15 Clean the unit with a vacuum.

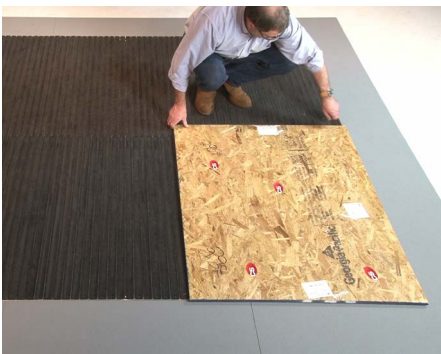

16 If construction is to continue in the building, protect the unit with plywood sheathing.



17 Care & Maintenance: to properly clean underneath the mat and avoid rail damage, roll back the mat edge to the 12th rail. Continue to roll back the mat holding that diameter.