

NOTES:


1. DIMENSIONS ARE TYPICAL.
2. FOR DRYWALL/PLASTER WALL CONSTRUCTION, IT IS RECOMMENDED FOR FASTENERS TO BE ENGAGED INTO METAL/WOOD STUDS TO MAINTAIN MAXIMUM PULLOUT STRENGTH.

WALL CONDITION	SPECIFIED FASTENER	DRILL DIAMETERS		C/S PART NUMBER
		WALL	RETAINER	
STEEL STUD/GYPSUM WALL	1/4-20 X 2" HEX HEAD BOLT STEEL/PLATED 1/4-20 X 2" TOGGLER 1/4" FLAT WASHER STEEL/PLATED	3/4"	N/A	90H042002 90H019004 90H007003
CONCRETE/CONCRETE BLOCK	1/4-20 X 1 1/2" S/S HEAD HEAD BOLT 1/4" FLAT WASHER STEEL/PLATED 1/4-20 X 1 1/4" 4-WAY LEAD SHIELD	1/2"	N/A	90H096002 90H007003 90H016004
WOOD STUD/GYPSUM WALL	1/4" X 3" HEX HEAD LAG SCREW 1/4" FLAT WASHER STEEL/PLATED	3/16"	N/A	90H087002 90H007003

INSTALLATION INSTRUCTIONS

24DZ

ECR-32S CRASH RAIL

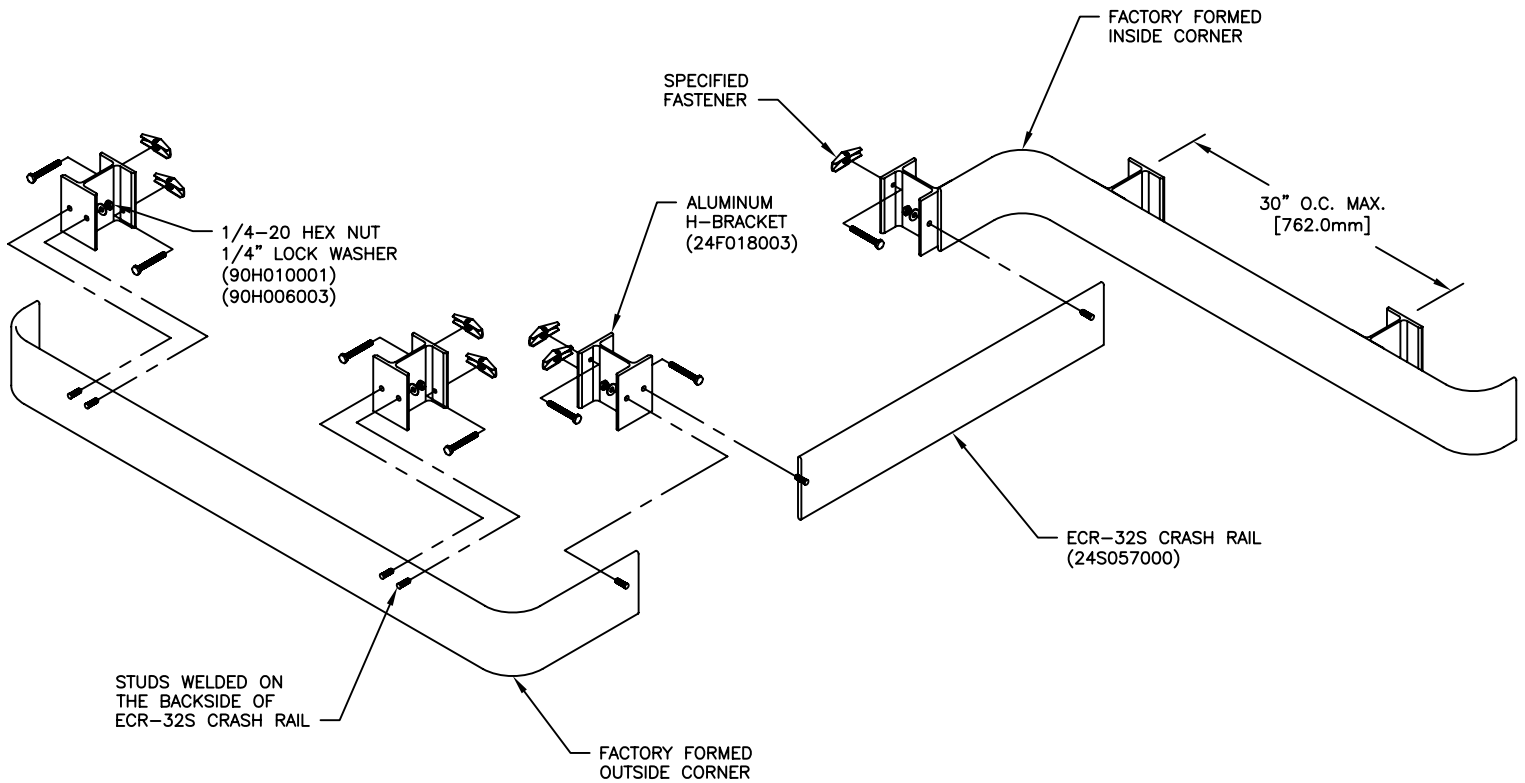

1. DISTRIBUTE MATERIAL. MATCH THE NUMBER ON THE BACK OF THE RAIL TO THE MARK NUMBER ON THE DRAWING. SOME LARGE RUNS REQUIRE MORE THAN ONE PIECE OF CRASH RAIL. THESE ARE NOTED WITH A MARK NUMBER AND A LETTER, I.E., 2001A 2001B.
2. ESTABLISH CRASH RAIL HEIGHT ABOVE THE FINISHED FLOOR. MEASURE FROM THE FLOOR TO REQUIRED RAIL HEIGHT AND DEDUCT 1/4" [6.35mm] TO LOCATE TOP EDGE OF BRACKET. SNAP A CHALK LINE AT THIS HEIGHT.
3. ATTACH BRACKETS TO RAIL WITH SUPPLIED LOCK WASHER AND HEX NUT.
4. USE RAIL WITH ATTACHED BRACKETS AS A TEMPLATE TO MARK BRACKET LOCATIONS ON THE WALL.
5. ONCE BRACKET LOCATIONS ARE ESTABLISHED ON THE WALL, REMOVE BRACKETS FROM THE RAIL.
6. LOOSELY ATTACH BRACKETS TO WALL WITH SPECIFIED FASTENERS.
7. ATTACH RAIL TO BRACKETS.
8. FASTENERS MUST BE TORQUED TO 150 IN/LBS.
9. REMOVE PROTECTIVE COATING FROM RAIL TO COMPLETE INSTALLATION.

CONSTRUCTION SPECIALTIES INC
DECOGARD PRODUCTS

MUNICY, PENNSYLVANIA 17756
MISSISSAUGA, ONTARIO L5E 2C2

A Member of the
CS GROUP
of Companies

8/7/06

This document is the property of Construction Specialties, Inc. and contains CONFIDENTIAL PROPRIETARY INFORMATION that is not to be disclosed to third parties and is not to be used without approval in writing from Construction Specialties, Inc.

FOR FURTHER ASSISTANCE CALL (800) 233-8493 OR FAX (570) 546-5169 OR IN CANADA CALL (888) 895-8955 OR FAX (905) 274-6241