

NOTES:


1. DIMENSIONS ARE TYPICAL.
2. FOR DRYWALL/PLASTER WALL CONSTRUCTION, IT IS RECOMMENDED FOR FASTENERS TO BE ENGAGED INTO METAL/WOOD STUDS TO MAINTAIN MAXIMUM PULLOUT STRENGTH.

WALL CONDITION	SPECIFIED FASTENER	DRILL DIAMETERS		PART NUMBER
		WALL	RETAINER	
STEEL STUD/GYPSUM WALL	1/4-20 X 2" HEX HD BOLT STEEL/PLATED	3/4"	N/A	90H042002
	1/4-20 X 2" TOGGLER			90H019004
	1/4" FLAT WASHER STEEL/PLATED			90H007003
CONCRETE/CONC. BLOCK	1/4-20 X 1 1/2" S/S HEX HD BOLT,	1/2"	N/A	90H096002
	1/4" FLAT WASHER STEEL/PLATED			90H007003
	1/4-20 X 1 1/4" 4-WAY LEAD SHIELD			90H016004
WOOD STUD/GYPSUM WALL	1/4" X 3" HEX HEAD LAG SCREW	3/16"	N/A	90H087002
	1/4" FLAT WASHER STEEL/PLATED			90H007003

INSTALLATION INSTRUCTIONS

24EJ

ECR-60A CRASH RAIL

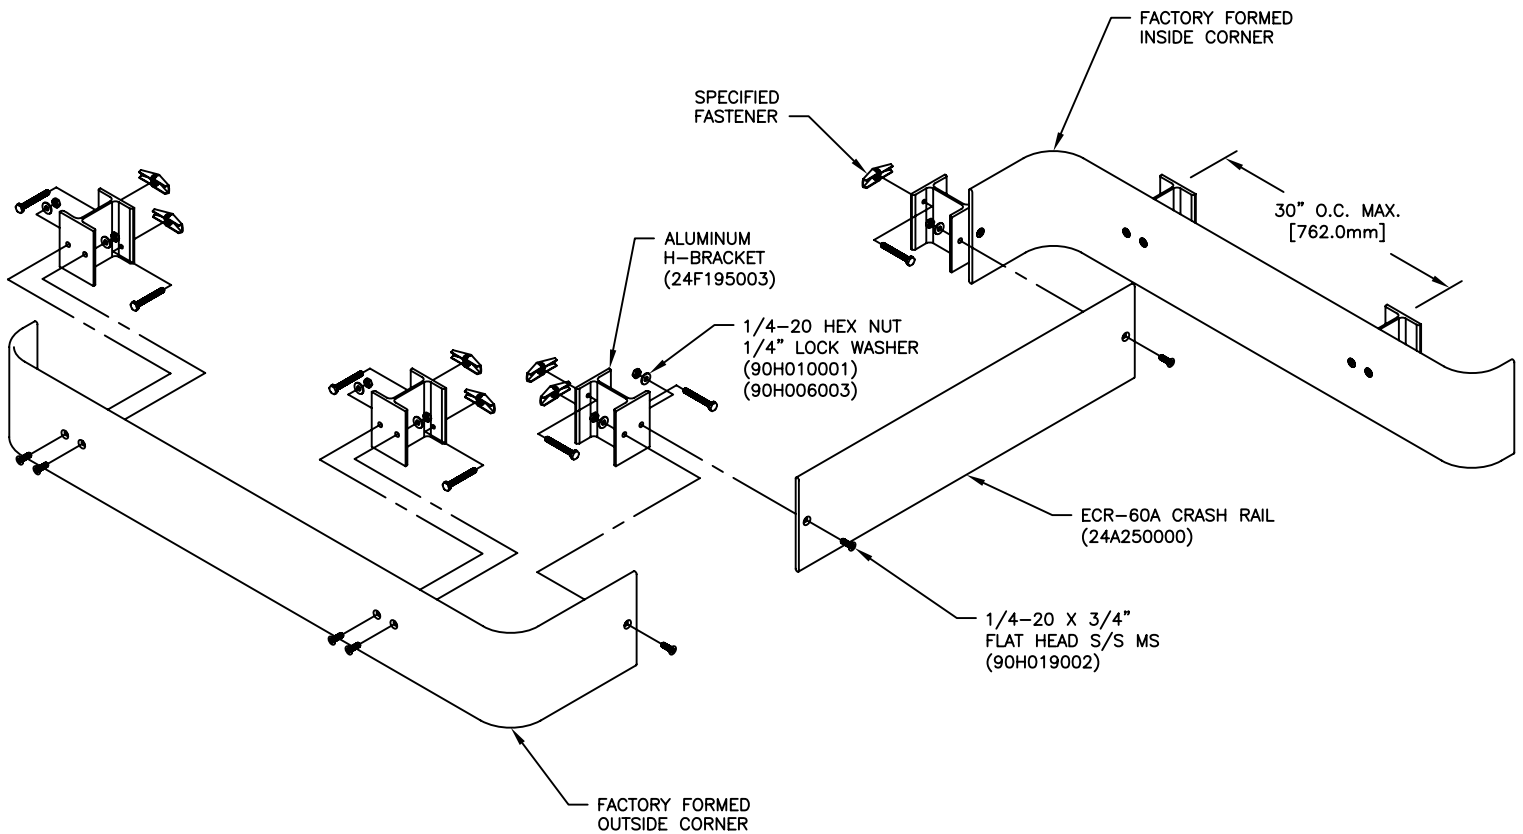

1. DISTRIBUTE MATERIAL. MATCH THE NUMBER ON THE BACK OF THE RAIL TO THE MARK NUMBER ON THE DRAWING. SOME LARGE RUNS REQUIRE MORE THAN ONE PIECE OF CRASH RAIL. THESE ARE NOTED WITH A MARK NUMBER AND A LETTER, I.E. 2001A 2001B.
2. ESTABLISH CRASH RAIL HEIGHT ABOVE THE FINISHED FLOOR. MEASURE FROM THE FLOOR TO REQUIRED RAIL HEIGHT AND DEDUCT 1/4" [6.35mm] TO LOCATE TOP EDGE OF BRACKET. SNAP A CHALK LINE AT THIS HEIGHT.
3. ATTACH BRACKETS TO RAIL WITH SPECIFIED FASTENERS.
4. USE RAIL WITH ATTACHED BRACKETS AS A TEMPLATE TO MARK BRACKET LOCATIONS ON THE WALL.
5. ONCE BRACKET LOCATIONS ARE ESTABLISHED ON THE WALL, REMOVE BRACKETS FROM THE RAIL.
6. LOOSELY ATTACH BRACKETS TO WALL WITH SPECIFIED FASTENERS.
7. ATTACH RAIL TO BRACKETS.
8. TIGHTEN ALL FASTENERS AND REMOVE PROTECTIVE COATING FROM RAIL TO COMPLETE INSTALLATION.

CONSTRUCTION SPECIALTIES INC
DECOGARD PRODUCTS

MUNICY, PENNSYLVANIA 17756
MISSISSAUGA, ONTARIO L5E 2C2

A Member of the
CS GROUP
of Companies

This document is the property of Construction Specialties, Inc. and contains CONFIDENTIAL PROPRIETARY INFORMATION that is not to be disclosed to third parties and is not to be used without approval in writing from Construction Specialties, Inc.

11/16/06

FOR FURTHER ASSISTANCE CALL (800) 233-8493 OR FAX (570) 546-5169 OR IN CANADA CALL (888) 895-8955 OR FAX (905) 274-6241